



**INTERNATIONAL JOURNAL OF ENGINEERING SCIENCES & RESEARCH  
TECHNOLOGY**

**DETECTION OF COMPUTER VIRUSES USING WELM\_FGA\_FCS**

**Ankur Singh Bist\***

\* Computer Engineering K.I.E.T, Ghaziabad.

**ABSTRACT**

Computer viruses are big threat for our society .The expansion of various new viruses of varying forms make the prevention quite tuff. Here we proposed WELM\_FGA\_FCS to detect computer viruses. The proposed method efficiently detects static and nature changing viruses.

**KEYWORDS:** WELM\_FGA\_FCS, Extreme Learning Machine.

**INTRODUCTION**

There are various processes that have been used in the direction of classification of computer viruses from normal files that will finally lead to virus detection. Machine learning techniques are widely used in this direction. As statistics says that the attacks of malicious codes are increasing day by day so there is requirement of strong techniques that can be used for their detection. Malicious code designers use lot of techniques that are difficult to analyse and detect. The static methods also seems not to work in the case where every time there are rapid dynamicity from attacker side so now a days main focus is going on towards the methods that are dynamic and are able to detect zero day computer viruses.

The rise in the malicious threats like computer viruses activities are required to be handled and observed strongly to make certain defence that can stand as a saviour of security domain. Other types of malware are:

1. Worms
2. Trojan horse
3. Botnets
4. Adware
5. Spyware

The mutating behaviour of metamorphic viruses is due to their adoption of code obfuscation techniques like dead code insertion, Variable Renaming, Break and join transformation. Figure 1 shows the assembly file of the virus code. Computer viruses like polymorphic viruses and metamorphic viruses use more efficient techniques for their evolution so it is required to use strong models for understanding their evolution and then apply detection followed by the process of removal. Code Emulation is one of the strongest ways to analyze computer viruses but the anti-emulation activities made by virus designers are also active [4] [5] [6][7] [8].



*Figure 1: Assembly code of Virus File*

**EXTREME LEARNING MACHINE**

Extreme Learning Machine (ELM) [1] is based on least square solution and was originally proposed for single hidden layer feed-forward network. The advantage of this is, rather than tuning of all the parameters here, hidden neurons and input weight, are chosen randomly. Here, hidden nodes may be sigmoid additive nodes or Gaussian kernel nodes. Hidden node parameters are randomly taken and output node parameter is calculated using Moore-Penrose inverse. This algorithm is thousand times faster than past learning methods such as, back propagation and also reaches the smallest training error. Due to these features, generalization performance of this algorithm is also good. We have given data  $(x_p, t_p)$  for N random different samples where,  $x_p=[x_{p1}, x_{p2}, \dots, x_{pn}]^t \in R^n$  and  $t_p=[t_{p1}, t_{p2}, \dots, t_{pm}] \in R^m$  Activation function  $g(x)$  with L hidden nodes is defined as

$$\sum_{p=1}^L \beta_p \cdot g_p(x_q) = \sum_{p=1}^L \beta_p \cdot g(w_p \cdot x_q + b_p) = o_q \quad \text{for } q=1,2,3,\dots,N$$

Where  $w_p=[w_{p1}, w_{p2}, \dots, w_{pn}]^t$  weight vector connecting  $p^{th}$  hidden node and input nodes.  
 $\beta_p=[\beta_{p1}, \beta_{p2}, \dots, \beta_{pm}]^t$  is weight vector connecting  $p^{th}$  hidden node and output nodes.  
 And  $b_p$  is the threshold of the  $p^{th}$  hidden node. With Activation function  $g(x)$  and L hidden nodes SLF's can

approximate these N samples with zero error i.e.  $\sum_{q=1}^L ||o_q - t_q|| = 0$

Thus, we can say that there exist  $w_p$ ,  $b_p$  and  $\beta_p$  such that,

$$\sum_{p=1}^L \beta_p \cdot g(w_p \cdot x_q + b_p) = t_q \quad \text{for } q=1,2,3,\dots,N$$

We can also show the above equation as

$$H\beta = T \tag{1}$$

Where  $H(w_1, \dots, w_L, b_1, \dots, b_L, x_1, \dots, x_N)$

$$= \begin{bmatrix} g(w_1 x_1 + b_1) & \dots & g(w_L x_1 + b_L) \\ \vdots & \dots & \vdots \\ g(w_1 x_N + b_1) & \dots & g(w_L x_N + b_L) \end{bmatrix}_{N \times L}$$

$$\beta = \begin{bmatrix} \beta_1^T \\ \vdots \\ \beta_L^T \end{bmatrix}_{L \times m} \quad \text{and} \quad T = \begin{bmatrix} t_1^T \\ \vdots \\ t_N^T \end{bmatrix}_{N \times m}$$

When the input weights ( $w_p$ ) and hidden layer biases ( $b_p$ ) are determined then output weight  $\beta_p$  is calculated as:

$$\beta = H^+ T$$

Where  $H^+$  is the Moore-Penrose generalized inverse of matrix H.

**WEIGHTED EXTREME LEARNING MACHINE**

Weighted extreme learning machine could be termed as extreme learning machine with weight matrix and regularization parameter. Regularization parameter is used to represent trade-off between maximizing marginal distance and minimizing misclassification error cost/value and, weight matrix is inversely proportional to the normalized input data.

Training samples are given in the form of  $(x_i, t_i)$  where,  $x_i \in R^n$  and  $t_i$  is either -1 or +1 for  $i=1, \dots, N$  and  $n$  is the number of features in each training sample. Define an  $N \times N$  diagonal weight matrix for each training sample  $x_i$  where, weight assigned to minority class is always greater than weight assigned to majority class. Input weight ( $w_{pj}$  for  $p=1, \dots, L, j=1, \dots, n$ ) between  $n$  input nodes and  $L$  hidden layer nodes and bias ( $b_p$  for  $p=1, \dots, L$ ) at each hidden layer node are randomly generated between 0 and 1. Hidden layer output is  $h_p = w_{pj} x_p + b_p$ . Output layer node output is  $y_i = h_1(x_i) \beta_1 + h_2(x_i) \beta_2 + \dots + h_L(x_i) \beta_L = \mathbf{h}(x_i) \boldsymbol{\beta}$  and output in vector form is  $\mathbf{Y} = \mathbf{H} \boldsymbol{\beta}$ . Target output is  $\mathbf{T} = t_1, t_2, \dots, t_N$ . Since it is a binary classifier so there is only one output node. Error vector is  $\boldsymbol{\xi} = \mathbf{Y} - \mathbf{T} = \mathbf{H} \boldsymbol{\beta} - \mathbf{T}$ . Output weight should be

such that the marginal distance is maximum for better generalization performance. Architecture of ELM is shown in fig. 1. So, for maximizing marginal distance and minimizing error vector we can model optimization function as

$$\text{Minimize: } f = \frac{1}{2} \|\beta\|^2 + \frac{1}{2} CW \sum_{i=1}^N \|\xi_i\|^2$$

$$\text{Subject to: } h(x_i)\beta = t_i^T - \xi_i^T, \text{ for } i=1,2,\dots,N$$

Solving this optimization function using langrage multiplier and Karush-Kuhn-Tucker theorem [2] we get required output weight as

$$\text{When N is small: } \beta = H^T \left( \frac{I}{C} + WHH^T \right)^{-1} WT$$

$$\text{When N is large: } \beta = \left( \frac{I}{C} + H^TWH \right)^{-1} H^TWT$$

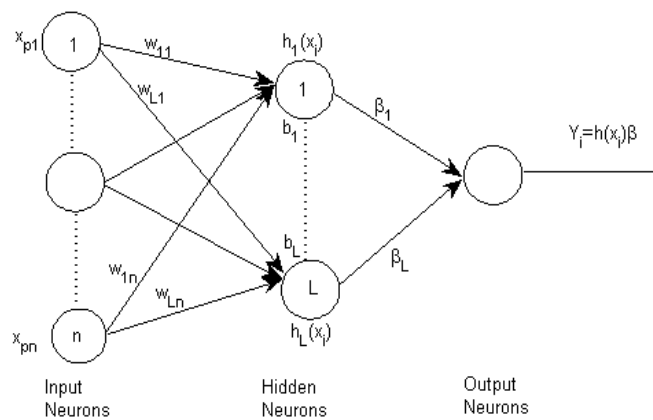


Fig.2. Architecture of Weighted ELM

**WEIGHT DETERMINATION IN WEIGHTED ELM**

In weighted ELM, two schemes for weighing misclassification are given. Minority misclassification weight is given as inverse of total minority samples and majority misclassification weight is given as inverse of total majority samples.

$$W_{Minority} = \frac{1}{\$(Minority)} \quad \text{and} \quad W_{Majority} = \frac{1}{\$(Majority)}$$

Where, \$(minority) is the number of samples belongs to minority class and \$(majority) is the number of sample belongs to majority class.

In other scheme, minority misclassification weight is given as inverse of number of minority samples multiplied by 1 and majority misclassification weight is given as inverse of majority samples multiplied by 0.618.

$$W_{Minority} = \frac{1}{\$(Minority)} \quad \text{and} \quad W_{Majority} = \frac{0.618}{\$(Majority)}$$

Here, minority misclassification weight is always greater than majority misclassification weight which causes proper positioning of classification boundary and hence determines good generalization performance [9] [10].

**GENETIC ALGORITHM**

```
GA(η, χ, μ)
//Initialize generation 0:
K: =0;
Pk : =a population of η randomly generated individuals.
//Evaluate Pk :
Compute fitness (i) for each i ∈ Pk ;
```

```

do
{
  //Create generation  $k+1$ 
  //1. Copy:
  Select  $(1-\chi) \times \eta$  members of  $P_k$  and insert into  $P_{k+1}$ 
  //2. CrossOver:
  Select  $(\chi \times \eta)$  members of  $P_k$  ; pair them up; produce offspring;
  //3. Mutate:
  Select  $(\mu \times \eta)$  members of  $P_{k+1}$  ; invert a randomly-selected bit in each;
  //Evaluate  $P_{k+1}$  :
  Compute fitness (i) for each  $i \in P_k$  ;
  //Increment :
   $K:=k+1$ ;
}
While fitness of individuals in  $P_k$  is not high enough.
return the fittest individual from  $P_k$ ;
 $\eta$  is the number of individuals in the population;
 $\chi$  is the fraction of population replaced by crossover in each iteration;
 $\mu$  is the mutation rate

```

#### Cuckoo Search Algorithm

```

Begin
  Objective function  $f(x)$ ,  $x = (x_1, \dots, x_d)^T$ 
  Generate initial population of
  n host nests  $x_i$  ( $i = 1, 2, \dots, n$ )
  while ( $t < \text{Max Generation}$ ) or (Stop criterion)
  Get a cuckoo randomly by Levy flights
  evaluate its quality/fitness  $F_i$ 
  Choose a nest among n (say, j) randomly
  If ( $F_i > F_j$ ),
  replace j by the new solution;
  end
  A fraction (pa) of worse nests
  are abandoned and new ones are built;
  Keep the best solutions
  (or nests with quality solutions);
  Rank the solutions and find the current best
end while Postprocess results and visualization
end

```

#### FCS + FGA METHOD

The general approach of the proposed FCS + FGA method can be described as follows:

1. It receives a required function to be optimized.
2. It evaluates the role of both GA and CS.
3. A main fuzzy system is responsible for receiving values resulting from step 2.
4. The main fuzzy system decides which method to use (GA or CS).
5. Then, another fuzzy system receives the Error and Derivate of error (DError) as inputs to evaluate if it is necessary to change the parameters in the GA or CS.
6. There are 3 fuzzy systems. One is for decision making (called main fuzzy), the second one is for changing parameters of the GA (called fuzzyga) and the third fuzzy system is used to change parameters of the CS (is called fuzzycs).
7. The main fuzzy system decides in the final step the optimal value for the function introduced in step 1. Repeat the above steps until the termination criterion of the algorithm is met.

## PROPOSED WORK

As we have seen that, Weighted ELM is a good approach for classification which overcomes the problem of presence of data with imbalanced class distribution in ELM and also improves the accuracy of ELM but, it is unable to provide optimal solution because, here misclassification cost or weight, which is assigned to binary classes is inversely proportional to the number of samples or we can say that, here, dependency of weight on number of samples exist which restricts search space for finding optimal weights at which good classification accuracy can be achieved.

As we have seen that, no considerable work had been done in this field till date .Therefore, in our proposed weighing scheme, we found weight with the help of FCS+ FGA method which, increases search space. Then these weights are assigned directly to the binary class which eliminates the dependency on number of samples. NGVCK and MWOR kit [3] is taken for generating virus dataset and normal files are taken from windows 7. After applying proposed technique satisfactory results are being achieved.

## CONCLUSION

This work proposes WELM\_FGA\_FCS for the detection of computer viruses, which improves the performance of WELM and gives optimal misclassification weights. This paper involves the NGVCK and MWOR kits used for malware generation. These kits are broadly used in research due to their property of generating challenging viruses that is not easy to detect. This study will be helpful for those working in the field of computer virology.

## ACKNOWLEDGEMENT

I wish to express my special thanks to all who supported me directly or indirectly in this work.

## REFERENCES

- [1] Huang G., Zhu Q., Siew C., "Extreme Learning Machine: A New Learning Scheme of Feedforward Neural Networks. International Joint Conference on Neural Networks", pp. 985–990, 2004.
- [2] Fletcher R., "Practical Methods of Optimization: Constrained Optimization. Wiley, New York 2". 2002.
- [3] **VX Heavens**. <http://vx.netlux.org/>
- [4] Bist, Ankur Singh, and Sunita Jalal. "Identification of metamorphic viruses." *Advance Computing Conference (IACC), 2014 IEEE International*. IEEE, 2014.
- [5] Bist, Ankur Singh. "Detection of metamorphic viruses: A survey." *Advances in Computing, Communications and Informatics (ICACCI), 2014 International Conference on*. IEEE, 2014.
- [6] Bist, Ankur Singh. "Classification and identification of Malicious codes." *IJCSE*. 2012.
- [7] Bist, Ankur Singh. "Fuzzy Logic for Computer Virus Detection." *IJESRT, ISSN: 2277-9655*.
- [8] Bist, Ankur Singh. "Hybrid model for Computer Viruses: an Approach towards Ideal Behavior." *International Journal of Computer Applications* 45 (2012).
- [9] Sharma, Rudranshu, et al. "Genetic Algorithm based Weighted Extreme Learning Machine for binary Imbalance Learning."
- [10] Sharma, Rudranshu, and Ankur Singh Bist. "INTERNATIONAL JOURNAL OF ENGINEERING SCIENCES & RESEARCH TECHNOLOGY MACHINE LEARNING: A SURVEY."